

TECHNICAL FEATURES

**F - M A X**

**S E R I E S**



Sharing the load

Technical Features	F-MAX	F-MAX L	F-MAX LL
<b>Engine</b>			
Type	GEN2 Ecotorq Euro 6 130 mm x 160 mm	GEN2 Ecotorq Euro 6 130 mm x 160 mm	GEN2 Ecotorq Euro 6 130 mm x 160 mm
Displacement (cc)	12.740 cm3	12.740 cm3	12.740 cm3
Power PS (kW)	510PS (375 kW) @1800d/d	510PS (375 kW) @1800d/d	510PS (375 kW) @1800d/d
Torque	2600Nm @1000-1300d/d	2600Nm @1000-1300d/d	2600Nm @1000-1300d/d
<b>Powertrain</b>			
Clutch	430 mm Single Disc	430 mm Single Disc	430 mm Single Disc
Transmission / Ratios	Automated: Ecotorq 16S 2600 OD (14,107 - 0,823)	Automated: Ecotorq 16S 2600 OD (14,107 - 0,823)	Automated: Ecotorq 16S 2600 OD (14,107 - 0,823)
Forward and Reverse Gear	16 forward + 4 reverse	16 forward + 4 reverse	16 forward + 4 reverse
FDR	2,31	2,31	2,17
<b>Axle &amp; Suspension</b>			
Axle Configuration	4x2	4x2	4x2
Front Axle	8 T	8 T	7,5 T
Rear Axle	XSS - 470, 11.5 T	XSS - 470, 11.5 T	XSS - 470, 11.5 T
Suspension	Parabolic Front Leaf Spring/ 2 Bellow Rear Air Suspension	Parabolic Front Leaf Spring/ 2 Bellow Rear Air Suspension	2 Bellow Front Air Suspension/ 4 Bellow Rear Air Suspension
<b>Brakes</b>			
Brake System	Dual Brake Circuit - Air Processing Unit with Integrated Oil Separator and Heater	Dual Brake Circuit - Air Processing Unit with Integrated Oil Separator and Heater	Dual Brake Circuit - Air Processing Unit with Integrated Oil Separator and Heater
Service Brake	Front and Rear Disc Brakes	Front and Rear Disc Brakes	Front and Rear Disc Brakes
Brakes (Front/Rear) (Ø.mm x mm. Length)	430 x 45 - Disc Brake	430 x 45 - Disc Brake	430 x 45 - Disc Brake
Engine Brake Power	max. 320 kW (Engine Level)	max. 320 kW (Engine Level)	max. 320 kW (Engine Level)
Hydraulic Retarder	max. 450 kW / continuous 160 kW	max. 450 kW / continuous 160 kW	max. 450 kW / continuous 160 kW
<b>Drivers Cab</b>			
Cabin Type	Extra High Roof Sleeper Cab	Extra High Roof Sleeper Cab	Extra High Roof Sleeper Cab
<b>Fuel &amp; AdBlue Tank</b>			
Fuel Tank	450L, Left Hand Side, Aluminum, 600L, Right Hand Side, Aluminum	600L, Left Hand Side, Aluminum, 750L, Right Hand Side, Aluminum	410L, Left Hand Side, Aluminum, 510L, Right Hand Side, Aluminum
SCR Tank	78 L	78 L	55 L
<b>Chassis</b>			
Thickness and Material	U Profile, High Strength, 8 mm Thickness, S500 MC Material	U Profile, High Strength, 8 mm Thickness, S500 MC Material	U Profile, High Strength, 10 mm Thickness, S500 MC Material
<b>5th Wheel</b>			
Brand / Model / Height	SAF Holland / SK-S 36.20 / 150 mm / 1100 mm	SAF Holland / SK-S 36.20 / 150 mm / 1100 mm	SAF Holland / SK-S 36.20 / 128 mm / 980 mm
Mounting Plate Height	12 mm	12 mm	12 mm
<b>Tires</b>			
Front Axle	315/70 R 22,5	315/70 R 22,5	315/60 R 22,5
Rear Axle	315/70 R 22,5	315/70 R 22,5	295/60 R 22,5
Rims	22.5X9.0 Steel	22.5X9.0 Steel	22.5X9.0 Steel

# Standard and Optional Features

April 2026

Standard and Optional Features	F-MAX	F-MAX L	F-MAX LL
<b>Safety &amp; Technology</b>			
Pre-Collision Assist	•	•	•
Lane Keeping Alert (LDWS)	•	•	•
Electronic Stability Program (ESP)	•	•	•
Driver Alert System	•	•	•
Moving-off Information System (MOIS)	•	•	•
Rear View Camera	•	•	•
Blind Spot Information System (BLIS)	•	•	•
Alcohol Interlock Facilitation	•	•	•
Traffic Sign Recognition	•	•	•
Emergency Stop Signal	•	•	•
Tire Pressure Monitoring System (TPMS)	•	•	•
Auto High Beam Headlamps	○	○	○
Pre-Collision Assist with Pedestrian Detection	○	○	○
Intelligent Adaptive Cruise Control with Stop & Go (iACC)	○	○	○
Lane Keeping Aid (LKA)	○	○	○
Electronic Brake System with ABS & ATC (EBS)	•	•	•
Electro-Hydraulic Steering System (EHPAS)	•	•	•
Retarder	○	○	○
Diferential Lock	•	•	•
Predictive Cruise Control (PCC)	•	•	•
<b>Interior</b>			
Multimedia System with 12.4" Touch Screen (DAB Radio, Bluetooth, USB (A Type - C Type), Apple CarPlay, Android Auto, Remote Control)	•	•	•
Navigation	○	○	○
12" Ghost Cluster	•	•	•
Driver Facing Camera (Only for GSR-C Countries)	•	•	•
Improved Sound and Heat Insulation	•	•	•
Air Conditioning	•	•	•
Dry & Wet Type Cab Heater	○	○	○
Dry Type Cab Heater	•	•	•
Electric Sunroof	•	•	•
Air Passenger Seat with Double Armrests	○	○	○
Heated and Air Suspension Driver Seat	•	•	•
Refrigerator (38 L)	•	•	•
Exterior Sunvisor	○	○	○
Axle Load Measurement Device	•	•	•
24 V / 130A Electric Socket	•	•	•
Adjustable New Color Ambiance Lightning	○	○	○
Driver Seatbelt Warning System	•	•	•
Upper Storage Area	•	•	•

Standard and Optional Features	F-MAX	F-MAX L	F-MAX LL
<b>Interior</b>			
Double Bed	○	○	○
Single Bed	●	●	●
7" Touch Screen Bed Side Control System & Type-C	●	●	●
Wireless Charger	○	○	○
Electronic Park Brake	●	●	●
Autohold	●	●	●
Black Alcantara Seat Fabric	●	●	●
Dark Interior Design	○	○	○
Dark Floor	●	●	●
Max lock	○	○	○
Interior Lighting with Reading and Night Light Functions	●	●	●
Multi-Function Remote Control Key, 2 pieces	●	●	●
Keyless Start	●	●	●
<b>Exterior</b>			
Spoiler & Side Extender	●	●	●
Side Skirt	○	-	-
78L SCR Tank	●	●	-
55L SCR Tank	○	-	●
JOST 5th Wheel	○	○	-
280L Aluminum Fuel Tank (Right Side)	○	-	-
600L Aluminum Fuel Tank (Right Side)	○	-	-
400L Aluminum Fuel Tank (Right Side)	○	-	-
450L Aluminum Fuel Tank (Left Side)	○	○	-
750L Aluminum Fuel Tank (Right Side)	-	○	-
750L (Right Side) + 450L Aluminum Fuel Tank (Left Side)	-	○	-
600L (Right Side) + 450L Aluminum Fuel Tank (Left Side)	●	○	-
750L (Right Side) + 600L Aluminum Fuel Tank (Left Side)	-	●	-
510L (Right Side) + 410L Aluminum Fuel Tank (Left Side)	-	-	●
Electrically Operated Cab Tilting	●	●	●
Air Horn	○	○	○
XSS - 510 Rear Axle (Tech Capacity: 13,5T)	○	○	-
7,5T Front Axle Capacity	○	○	●
19T GVM	○	○	○
Engine PTO	○	○	-
NH4C Pump Type Offset Output PTO	○	○	-
NH4B Flange Type Offset Output PTO	○	-	-
Twin PTO (High Ratio)	○	○	○
FL, EX/II & AT Classification ADR Package*	○	○	○
Luxury Package (Black LED Headlamp, Heated & Air Suspension Passenger Seat, Dark Interior Design, Air Horn, Ambience Lights, Wireless Charging, Mattres Topper For Lower Bed Nightlock)	○	○	○
Aluminum Rims (Ford)	○	○	○
Aluminum Rims (Alcoa)	○	○	○

Standard and Optional Features	F-MAX	F-MAX L	F-MAX LL
<b>Exterior</b>			
Without Front Spare Tire	•	•	•
Front Spare Tire / Rim	○	○	○
LED Projector Headlamps	○	○	○
Halogen Headlamps	•	•	•
Tail (Rear Stop) Lamp	•	•	•
Rain Sensor & Autolamps	•	•	•
AGM Battery	•	•	•
Plateless 5th Wheel (for 1050 mm and 1100 mm JOST & C4AS)	○	-	-
No Grease 5th Wheel (1100 mm & 1200 mm)	○	○	-
New Low Rolling Resistance Tires	•	•	•
385/55 R22.5 Front Tire (With 315/70 R 22.5 Rear Tire)	○	○	-
385/65 R22.5 Front Tire (With 315/80 R 22.5 Rear Tire)	○	○	-
355/50 R22.5 Front Tire (With 295/60 R 22.5 Rear Tire)	-	-	○
355/50 R22.5 Front Tire (With 315/60 R 22.5 Rear Tire)	○	○	-
4 Bellows Rear Air Suspension (C4AS)	○	○	○
Front Air Suspension	○	○	•
Adjustable Air Compressor	•	•	•
Caliper with Pad Return Spring	•	•	•
Side Extender Sealings & Wheel Arch Capping& Winglet & Door Bumper Sealer & Speed Lip & A-Pillar Deflector	•	•	•
Active Grill Shutter	•	•	•
HVO Compatability	•	•	•
Digital Mirror System (Base Pack) **	•	•	•
Digital Mirror System (Premium Pack) ***	○	○	○
Conventional Mirrors (Heated and Electrically Controlled Side Mirrors) ****	○	○	○
Smart Tachograph	•	•	•
Cabin With Air Suspension	•	•	•
Body Color Front Grill	•	•	•
Mattress Topper for Lower Bed	○	○	○
Long Bumper	•	•	•
Eco+Mode	•	•	•
Toll Collect Infrastructure	•	•	•
Cold Pack (Heated Windscreen, Extra Cabin Isolation, 225 Ah Batteries)	○	○	○
Dual Color	○	○	○
Front Towing Hooks	○	○	○
Double Front Hook	○	○	○
LED Working Lamp	•	•	•
Steel air tank	•	•	•
Aluminium air tank	○	○	○


• Standard ○ Optional

\* Only with Conventional mirrors

\*\* Not available with ADR; standard only for VECTO-regulated countries

\*\*\*Not available with exterior sunvisor

\*\*\*\*Standard for Non VECTO-regulated countries

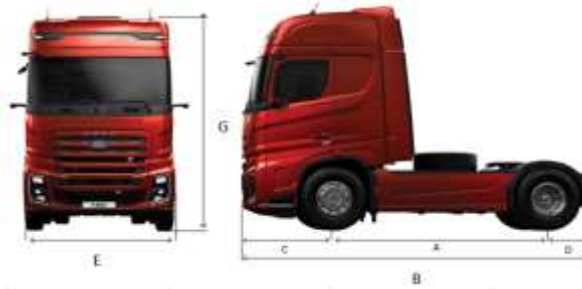

Dimensions (mm)	F-MAX	F-MAX L	F-MAX LL
Wheelbase (A)	3600	3750	3600
Overall Length (B)	5877	6162	5907
Front Overhang (C)	1420	1450	1443
Rear Overhang (D)	857	962	873
Overall Vehicle Width (Excluding Mirrors) (E)	2540	2540	2540
Overall Cab Length (F)	2350	2350	2350
Total Vehicle Height (G)	3962	3919	3950
Turning Radius	7590	7810	7590
Useful Chassis Length	3150	3243	3135

Tire & FDR	5th Wheel Height	FDR	Rear Tire	Loaded 5th Wheel Height (10 mm Tolerance)	Unloaded 5th Wheel Height (10 mm Tolerance)
F-MAX	1050 mm	2,47	315/60 R22,5	1075 mm	1098 mm
	1100 mm	2,31 & 2,47	315/70 R22,5	1120 mm	1147 mm
	1150 mm	2,47	295/80 R22,5	1161 mm	1194 mm
	1200 mm	2,47	295/80 R22,5	1192 mm	1225 mm
	1200 mm	2,47	315/80 R22,5	1221 mm	1245 mm
	1250 mm	2,47	295/80 R22,5	1264 mm	1290 mm
F-MAX L	1250 mm	2,47	315/80 R22,5	1286 mm	1310 mm
	1050 mm	2,47	315/60 R22,5	1075 mm	1098 mm
	1100 mm	2,31 & 2,47	315/70 R22,5	1120 mm	1147 mm
	1150mm	2,31 & 2,47	315/70 R22,5	1152 mm	1179 mm
	1200 mm	2,31 & 2,47	315/70 R22,5	1183 mm	1210 mm
F-MAX LL	1250 mm	2,47	315/80 R22,5	1286 mm	1310 mm
	980 mm	2,17 & 2,31	295/60 R22,5	976 mm	999 mm

	Weights (kg)	1st Axle	2nd Axle	Total
F-MAX	Technically Permissible Weight	8000	12000	18000
	Kerb Weight**	5921	2492	8413
	Payload**	2079	9508	9587
	Regulatory Permissible Weight	8000	11500	18000
F-MAX L	Technically Permissible Weight	8000	12000	19000
	Kerb Weight	5996	2633	8629
	Payload	2004	9367	10371
	Regulatory Permissible Weight	8000	11500	18000
F-MAX LL	Technically Permissible Weight	7500	11650	18000
	Kerb Weight	5868	2248	8116
	Payload	1632	9402	9884
	Regulatory Permissible Weight	7500	11500	18000

\*The kerb weight data includes a 90% full fuel tank, other fluids, tools, a spare tire, and a driver weighing 75 kg. Weight values may vary depending on the vehicle configuration.



This brochure contains products prepared for Ford Trucks vehicles. Printed in April 2026, this brochure provides information about the technical specifications and equipment offered as standard or optional at the time of printing. From time to time, changes may occur in the standard and optional equipment features of the vehicles. Therefore, we kindly ask you to consult our authorized dealers to obtain up-to-date and accurate information regarding the features of the vehicle you wish to purchase. For this reason, this brochure does not constitute a commitment regarding the specified features.